

INSULATE
SEAL
PROTECT

3:1
SHRINK RATIO



HEAT SHRINK WRAPAROUND SLEEVE DESIGNED FOR REPAIR OF DETERIORATED SPLICES

MEDIUM WALL, HEAT SHRINK WRAPAROUND SLEEVE WITH ADHESIVE FOR COMPLETE ENVIRONMENTAL SEALING WITHOUT THE NEED FOR DISCONNECTION. IDEAL FOR RETROFIT PROTECTION OF EXPOSED CONNECTORS AND THE REPAIR OF DAMAGED CABLE.

FEATURES AND BENEFITS

- Shrink ratio: 3:1
- Fast and simple installation without interruption of service
- Repair damaged cable jackets
- Suitable for low voltage electrical and mechanical applications
- Proven thermoplastic adhesive ensures an absolutely waterproof seal
- High impact and abrasion resistance
- Minimal heat required to produce error free installation without splitting
- CFM QuickWrap can be cut to size in field to suit application
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C


TYPICAL APPLICATIONS

- Connectorized cable repairs
- Retrofit protection of connectors
- Cable jacket repairs



DIMENSIONS

ORDER	LENGTH		WIDTH		RECOMMENDED OVERLAP				EXPANDED SLEEVE ID WITH OVERLAP (MIN-MAX)		APPLICATION RANGE (MIN-MAX)		CONDUCTOR SIZE
	IN	MM	IN	MM	IN (MIN.)	MM (MIN.)	IN (MAX.)	MM (MAX.)	IN	MM	IN	MM	AWG/MCM
1100	6	152	4.1	104	0.79	20.1	1.35	34.3	0.65-0.78	16.5-19.8	0.35-0.68	9-17	#6-1/0
1500	12	305	5.7	145	1.13	28.6	2.36	59.8	0.75-1.14	19.1-29.0	0.50-1.00	13-25	#2/0-350
2050	12	305	7.3	185	1.13	28.6	3.14	79.8	1.00-1.64	25.4-41.7	0.70-1.50	18-38	250-500
2750	12	305	9.5	241	1.20	30.5	4.24	107.7	1.35-2.32	34.3-58.9	1.00-2.00	25-58	600-1000

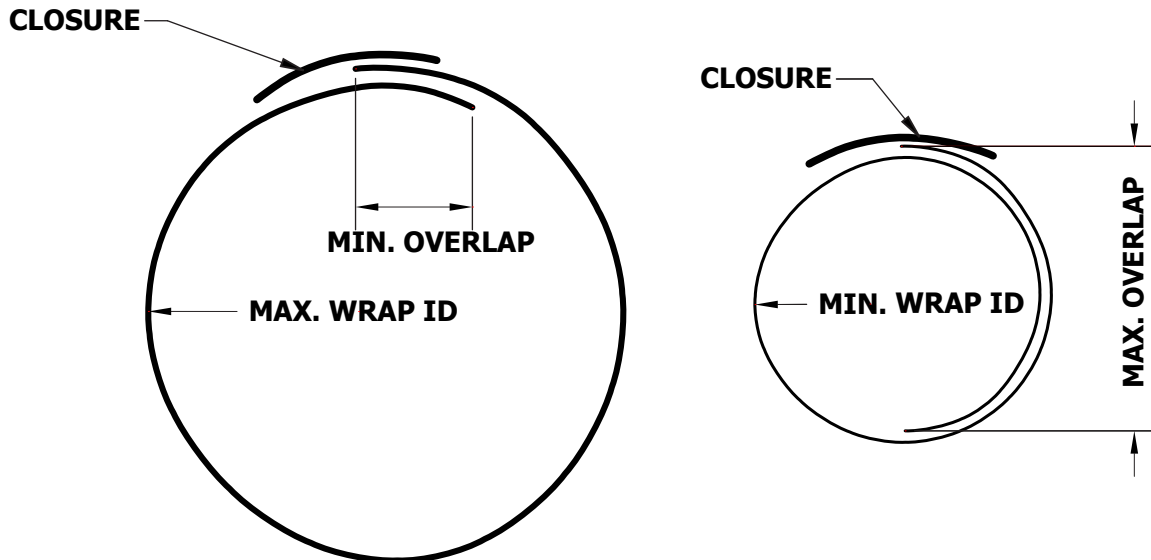

INSTALLATION NOTES

- CFM QuickWrap is a one size fits all solution that can accommodate all sizes of cable and connectors. QuickWrap can be cut to length and width in the field to fit the specific application. Simply wrap the sleeve around the cable or connector, ensuring adequate overlap (allow for a minimum of 3 in or 76 mm), and then firmly apply the closure to hold CFM QuickWrap together during the heat shrinking process. Please refer to the installation instructions included with each CFM QuickWrap for more detailed information.

ORDERING

- Please specify the product name plus the options you require.
- Order Example: CFM QuickWrap 1100, 6 in length

Please contact your Customer Service Representative for information on custom sizes and lengths

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.