

INSULATE
SEAL
PROTECT

3:1
SHRINK RATIO



HEAVY WALL CROSS-LINKED POLYOLEFIN END CAP

HEAT SHRINK END CAPS PROVIDE A SIMPLE YET EFFECTIVE METHOD FOR SEALING CABLE ENDS, PIPE, CONDUIT OR OTHER SIMILAR OBJECTS WHERE MAXIMUM FLAME RETARDANCY IS REQUIRED

FEATURES AND BENEFITS

- 3:1 shrink ratio
- Flame retardant
- Superior resistance to weathering, moisture contamination and adverse environmental conditions
- Resistant to common fluids and solvents
- Standard adhesive liner provides complete environmental protection and insulation
- Heat indicating lines
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C

STANDARDS

- Rated for 600/1000 V, 90°C continuous use

TYPICAL APPLICATIONS


- Watertight sealing of cable ends and pipe conduit



DIMENSIONS

ORDER NUMBER	EXPANDED LENGTH ¹ (NOM.)		EXPANDED		RECOVERED				GENERAL USE DIAMETER		CABLE RANGE
			INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W				
	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	AWG/MCM
0350-RL	50.8	2.0	8.9	0.35	3.0	0.12	1.8	0.07	3.5 - 8	.15 - .300	#14 - #10
0500-RL	63.5	2.5	13.0	0.51	4.1	0.16	2.4	0.09	4.5 - 11	.20 - .450	#8 - #6
0750-RL	63.5	2.5	19.0	0.75	6.1	0.24	2.4	0.09	6 - 16.5	.24 - .650	#6 - #2
1100-RL	76.2	3.0	27.9	1.10	8.9	0.35	3.0	0.12	10 - 24	.40 - .950	#1 - 3/0
1500-RL	88.9	3.5	38.1	1.50	11.9	0.47	4.1	0.16	13 - 35	.55 - 1.40	2/0 - 350
2000-RL	88.9	3.5	50.8	2.00	16.0	0.63	4.1	0.16	17.5 - 44	.70 - 1.75	250 - 500
2700-RL	101.6	4.0	68.1	2.70	22.1	0.87	4.1	0.16	24 - 59	.95 - 2.30	600 - 1000
3500-RL	114.3	4.5	89.9	3.50	30.0	1.18	4.1	0.16	33 - 80	1.3 - 3.30	800 - 1250
4700-RL	139.7	5.5	119.4	4.70	39.9	1.57	4.2	0.17	44 - 104	1.7 - 4.10	1500 - 2500

¹Length is measured from shoulder to open end of cap

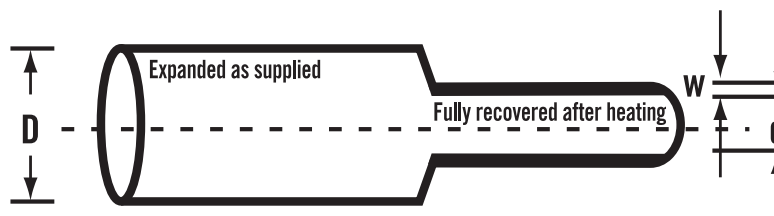

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resultant wall thickness will be less than specified.
- Select options:
 - Printing: Printed or Unprinted
 - Adhesive Lining: Lined (D) or Unlined (U)
- Please specify the product name, order reference number and options you require
- Order example: CCAP-FR, 1500-RL, black, unprinted, lined

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.