

CESK SERIES

INSULATE
SEAL
PROTECT

3:1
SHRINK RATIO



ELBOW GROUNDING/SEALING KITS

CESK ELBOW SEALING KIT FOR SEALING AND REINFORCING LOAD-BREAK AND DEAD-BREAK ELBOWS ON JACKETED POWER CABLES


CESK-xG ELBOW SEALING KIT FOR SEALING, EXTERNALLY GROUNDING AND REINFORCING LOAD-BREAK AND DEAD-BREAK ELBOWS ON JACKETED METAL TAPE SHIELDED POWER CABLES.

FEATURES AND BENEFITS

- 3:1 shrink ratio
- Easy installation
- Wide application range; only 2 sizes for virtually all elbow and cable combinations
- Heat activated seals for preventing moisture ingress
- Tough heavy wall tube to mechanically reinforce the elbow-to-cable interface to prevent flexing during hot-stick operation of the elbow
- Sealant tested for compatibility with semi-conductive components
- CESK-xG kits include a solderless external grounding kit with three feet of moisture blocked, tinned copper braid

TYPICAL APPLICATIONS

- Environmental sealing of dead-break elbows on jacketed power cables
- Grounding metal tape shielded power cables

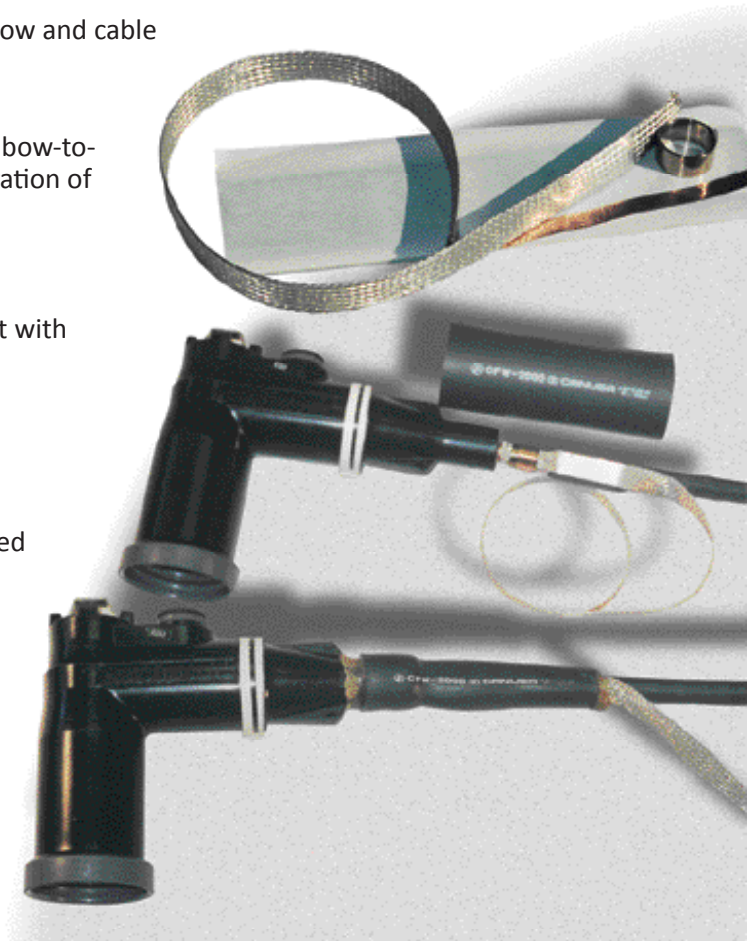

DIMENSIONS

ORDER NUMBER	CONDUCTOR SIZE/VOLTAGE CLASS			
	5 kV	15 kV	25 kV	35 kV
CESK - ELBOW SEALING (NO EXTERNAL GROUNDING KIT): FOR JACKETED WIRE SHIELD OR CONCENTRIC NEUTRAL CABLE				
CESK 1	#2 - 500	#2 - 250	#1 - 3/0	n/a
CESK 2	600 - 1000	350 - 1000	4/0 - 1000	1/0 - 1000
CESK-XG - ELBOW SEALING WITH EXTERNAL GROUNDING KIT: FOR JACKETED METAL TAPE SHIELDED CABLE				
CESK 1G	#2 - 500	#2 - 250	#1 - 3/0	n/a
CESK 2G	600 - 1000	350 - 1000	4/0 - 1000	1/0 - 1000

ORDERING

- Select the appropriate kit from the table above based on voltage class and conductor size.
- Kit Contents:
 - CESK: one piece uncoated tubing and CTSR sealant to prevent moisture ingress
 - CESK-XG: one piece uncoated tubing, CTSR sealant and stainless steel constant force spring, copper foil tape and moisture blocked flexible tinned copper braid for external grounding
- Order Example: CESK 1 or CESK 1G

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.