

INSULATE
SEAL
PROTECT

4:1
SHRINK RATIO



HIGHLY FLAME RETARDANT HEAT SHRINK POLYOLEFIN TUBING

HIGHLY FLAME RETARDANT, SEMI-RIGID, CROSS-LINKED DUAL WALL HEAT SHRINK TUBING DESIGNED FOR SPLICE SEALING AND FUSE LINK PROTECTION

FEATURES AND BENEFITS


- 4:1 shrink ratio to cover varying splice configurations and substrate profiles
- Jacket and adhesive are exceptionally flame retardant
- Economical way to environmentally seal and protect automotive fuse-links, splices and terminals
- Highly resistant to common automotive fluids and solvents
- Semi-rigid and mechanically tough outer jacket provides added strain relief and excellent abrasion protection
- Thick adhesive liner forms an effective barrier against fluids and moisture penetration
- Continuous operating temperature: -55°C to 125°C
- Shrink temperature: 125°C

STANDARDS

- Approved to Delphi M3552 and Ford WSS- M99D56-A4


TYPICAL APPLICATIONS

- Automotive wire harness splice sealing and strain relief
- Insulation and environmental protection of terminals, connectors, splices and fuse links

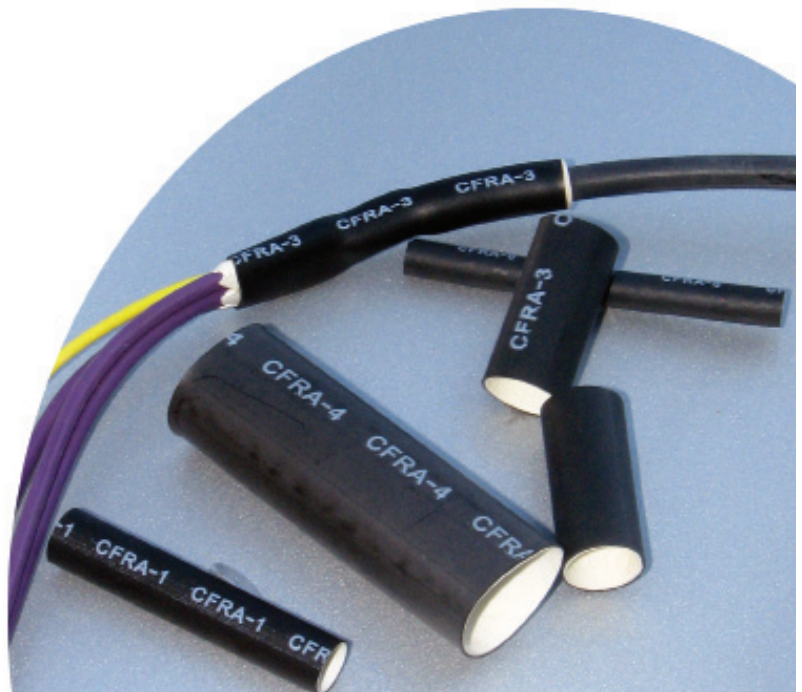

DIMENSIONS

SIZE	EXPANDED		RECOVERED					
	INTERNAL DIAMETER (MIN) D		INTERNAL DIAMETER (MAX) d		WALL THICKNESS (NOM) W		ADHESIVE WALL THICKNESS	
	MM	IN	MM	IN	MM	IN	MM	IN
No. 0	5.08	0.200	1.27	0.050	1.40	0.055	0.635	0.025
No. 1	7.62	0.300	1.65	0.065	1.52	0.060	0.762	0.030
No. 2	9.02	0.355	2.29	0.090	1.52	0.060	0.762	0.030
No. 3	11.56	0.455	2.54	0.100	2.29	0.090	1.270	0.055
No. 4	17.78	0.700	4.45	0.175	2.54	0.100	1.524	0.060

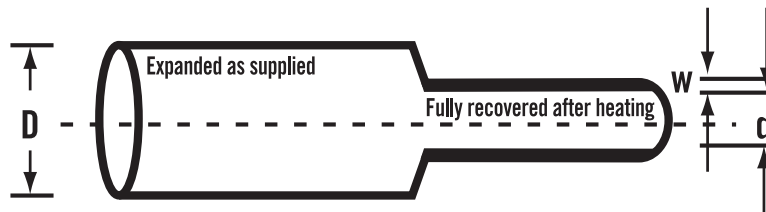

INSTALLATION

- DSG-Canusa offers a comprehensive selection of technically advanced shrink appliances that ensure process stability and repeatability
- Minimum recovery temperature 120°C
- Adhesive activation temperature 110°C

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resultant wall thickness will be less than specified.
- CFRA is cut to length on request.
- Please specify the product name, order reference number and options you require
- Order Example: CFRA, No. 0, black, 65 mm length

Please contact your Customer Service Representative for information on custom sizes, lengths and material data sheet.