

CNP 200

INSULATE
SEAL
PROTECT

2:1
SHRINK RATIO



THIN WALL NEOPRENE

NEOPRENE HEAT SHRINK TUBING SUITABLE FOR HARNESSING, HYDRAULIC COUPLINGS AND APPLICATIONS REQUIRING EXCEPTIONAL FLEXIBILITY

FEATURES AND BENEFITS

- 2:1 shrink ratio
- Superior cut-through and abrasion resistance
- Very flexible even at low temperatures
- Excellent oil resistance
- Continuous operating temperature: -70°C to 120°C
- Shrink temperature: 135°C

STANDARDS

- MIL-R-46846 Type 1
- Meets SAE-AMS-DTL-23053/1 Class 1 and 2
- AMS 3623


TYPICAL APPLICATIONS

- Insulation, strain relief and abrasion resistance for wire harnesses exposed to fluids and solvents



DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED			
	INTERNAL DIAMETER (MIN) D		INTERNAL DIAMETER (MAX) d		WALL THICKNESS (NOM) W	
	MM	IN	MM	IN	MM	IN
0125	3.2	1/8	1.57	0.072	0.760	0.030
0187	4.8	3/16	2.36	0.106	0.890	0.035
0250	6.4	1/4	3.18	0.125	0.890	0.035
0375	9.5	3/8	4.75	0.187	1.020	0.040
0500	12.7	1/2	6.35	0.250	1.220	0.048
0750	19.0	3/4	9.53	0.375	1.450	0.057
1000	25.4	1	12.70	0.500	1.780	0.070
1500	38.1	1½	19.05	0.750	2.410	0.095
2000	50.8	2	25.40	1.000	2.790	0.110
3000	75.2	3	38.10	1.500	3.180	0.125

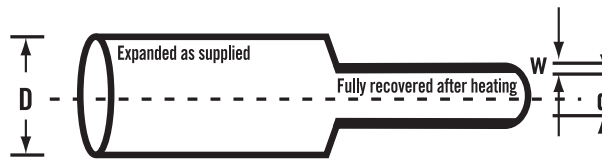

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resultant wall thickness will be less than specified.
- Select options:
 - Colour: Black (BK)
 - Printing: Printed or Unprinted
- Please specify the product name, order reference number and options you require
- Order Example: CNP 200, 0250, black, unprinted

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.