

# CPX 201

INSULATE  
SEAL  
PROTECT

3:1  
SHRINK RATIO



## THIN WALL CROSS-LINKED POLYOLEFIN

YELLOW AND GREEN STRIPED HEAT SHRINK TUBING THAT IS FLEXIBLE AND FLAME RETARDANT

### FEATURES AND BENEFITS

- High shrink ratio: 3:1
- Striped colour combination designates international electrical grounding
- Flame retardant
- Resistant to common fluids and solvents
- Flexible
- Continuous operating temperature: -55°C to 135°C
- Shrink temperature: 90°C

### STANDARDS

- Meets SAE-AMS-DTL-23053/5 Class 1 (performance and material); AMS 3636


### TYPICAL APPLICATIONS

- Identify ground wire and terminals
- Electrical insulation of in-line connections



DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W			
	MM	IN	MM	IN	MM	IN	M	FT
0125	3.2	1/8	1.0	0.039	0.55	0.022	150	500
0187	4.8	3/16	1.5	0.059	0.60	0.024	60	200
0250	6.4	1/4	2.0	0.079	0.65	0.026	150	500
0375	9.5	3/8	3.0	0.118	0.75	0.030	60	200
0500	12.7	1/2	4.0	0.157	0.75	0.030	60	200
0750	19.0	3/4	6.0	0.236	0.85	0.033	30	100
1000	25.4	1	8.0	0.315	1.00	0.039	30	100
1535	39.0	1.50	13.0	0.512	1.15	0.045	30	100

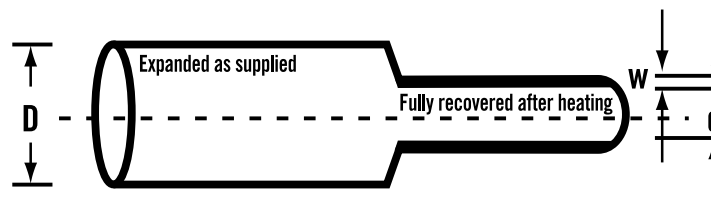

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resultant wall thickness will be less than specified.
- Select options:
  - Colour: Yellow/green stripes
  - Printing: Printed or Unprinted
  - Length: Continuous reels
- Please specify the product name, order reference number and options you require
- Order Example: CPX 201, 0250, yellow/green stripes, unprinted, 500 ft lengths

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.