

CWWT 450

INSULATE
SEAL
PROTECT

4:1
SHRINK RATIO



THIN WALL ADHESIVE LINED CROSS-LINKED POLYOLEFIN


WATER CLEAR, ADHESIVE LINED, HEAT SHRINK TUBING SPECIFICALLY DESIGNED FOR WATER WELL PUMP APPLICATIONS. PROVIDES EXCELLENT CLARITY ON RECOVERY WHILE INSULATING AND PROTECTING ELECTRICAL CONNECTIONS

FEATURES AND BENEFITS

- 4:1 shrink ratio
- High shrink ratio allows for a wide range of diameters
- Allows for the examination of substrate wiring
- Adhesive lined for a water tight seal
- Flexible
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C

TYPICAL APPLICATIONS

- Environmental protection and insulation of electrical connections
- See-through over protection of labels and printing
- Irrigation and landscape lighting systems

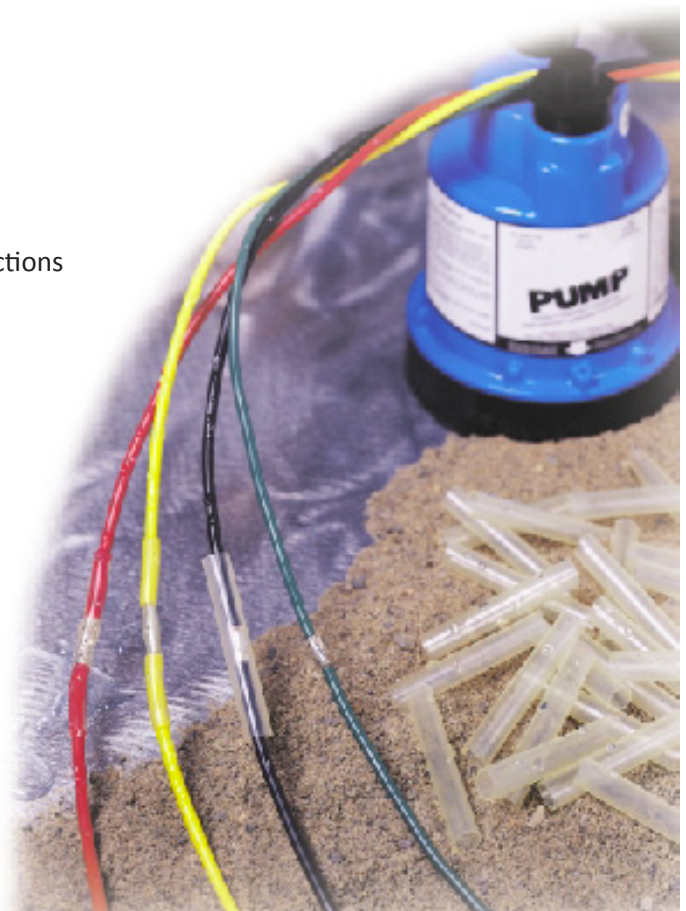


THIN WALL ADHESIVE LINED CROSS-LINKED POLYOLEFIN

CWWT 450

DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		TOTAL WALL THICKNESS (NOM.) W			
	MM	IN	MM	IN	MM	IN	MM	IN
0400	10.5	0.413	2.6	0.102	1.1	0.043	76.2	3

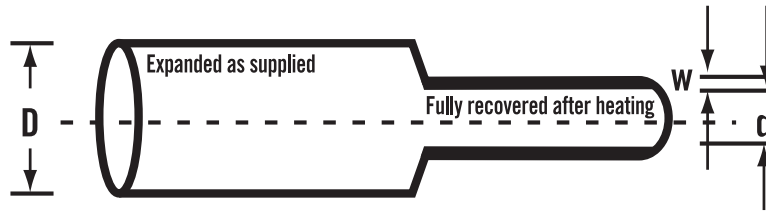

ORDERING

- Select options:
 - Colour: Clear (CL)
- Please specify the product name, order number and options you require
- Order Example: CWWT 450, 0400, clear

Please contact your Customer Service Representative for information on custom sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.