

# DROP

INSULATE  
SEAL  
PROTECT

3:1  
SHRINK RATIO



## DROP TUBING

THIN WALL HEAT SHRINK TUBING PROVIDES EXCELLENT ENVIRONMENTAL PROTECTION AND INSULATION FOR CATV DROP CONNECTORS

### FEATURES AND BENEFITS

- Shrink ratio: 3:1
- Meltable inner liner encapsulates cable and connection completely
- Excellent UV and ozone resistance
- Resistant to all fluids and solvents
- Accommodates all F-Connectors and cables
- Flexible
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C


### TYPICAL APPLICATIONS

- Sealing of coaxial drop connectors



## DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED						LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W		MELTABLE WALL THICKNESS (NOM.)			
	MM	IN	MM	IN	MM	IN	MM	IN	M	IN
0500	12.7	0.50	5.0	0.19	1.4	0.05	0.9	0.03	1.2	48
0750	19.1	0.75	8.0	0.31	1.7	0.06	1.0	0.04	1.2	48

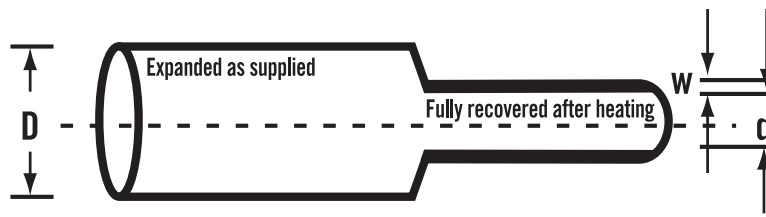

## ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Options:
  - Colour: Black (BK), Blue (BL)
- Order Example: DROP Tubing, 0500, black, unprinted

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.