

INSULATE
SEAL
PROTECT

3:1
SHRINK RATIO



SEMI-RIGID TRANSLUCENT ADHESIVE LINED TUBING


SEMI-RIGID, TRANSLUCENT, ADHESIVE LINED TUBING SPECIFICALLY DESIGNED FOR CRIMP CONNECTION ASSEMBLY APPLICATIONS AND WHERE INSPECTION OF THE WIRE SUBSTRATE IS ESSENTIAL

FEATURES AND BENEFIT

- 3:1 shrink ratio
- Adhesive liner insulates and protects electrical connections
- Translucent to allow for inspection of the substrate connection
- Semi-rigid backing provides tough abrasion resistance and superior strain relief
- Colour coded for wire gauge identification
- Highly resistant to water, solvent and chemical penetration
- Available in 4 ft sticks or cut pieces
- Continuous operating temperature: -40°C to 110°C
- Shrink temperature: 105°C

TYPICAL APPLICATIONS

- Repair of wire harnesses
- Protective cover for crimp connections
- Colour code and print used to identify wire gauge

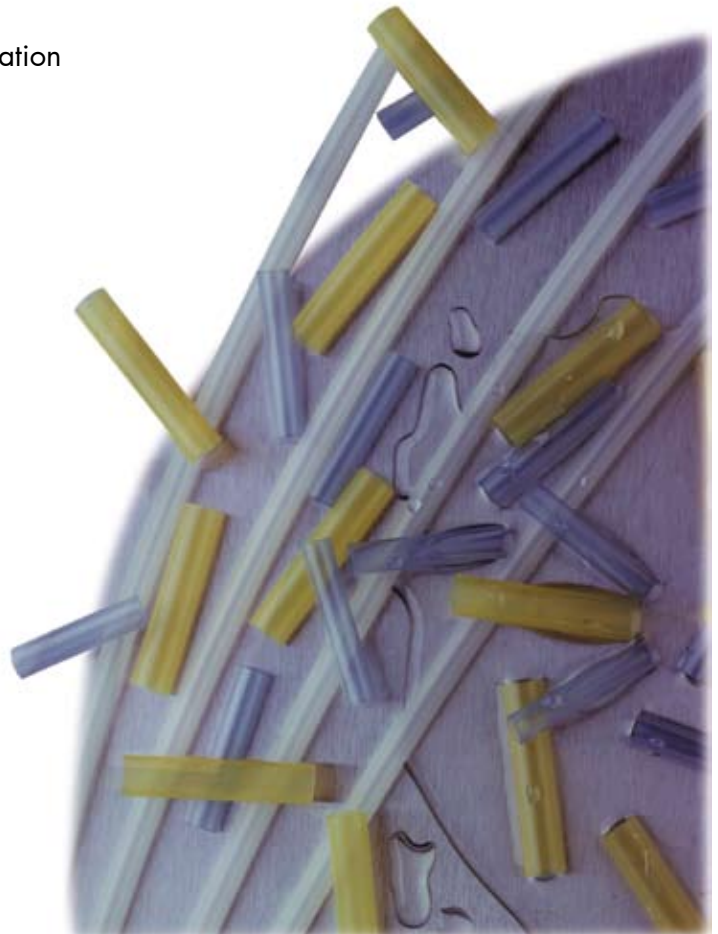


SEMI-RIGID TRANSLUCENT ADHESIVE LINED TUBING

DERAY® MDKT

DIMENSIONS

ORDER NUMBER	COLOUR	EXPANDED		RECOVERED				APPLICATION RANGE		LENGTH	
		INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) D		WALL THICKNESS (NOM.) W					
		MM	IN	MM	IN	MM	IN	AWG	MM	M	FT
0045	Red	4.5	0.177	1.4	0.055	1.1	0.043	22 - 18	0.5 - 1.5	1.22	4
0055	Blue	5.5	0.216	1.8	0.070	1.2	0.047	16 - 14	1.5 - 2.5	1.22	4
0068	Yellow	6.8	0.268	2.2	0.086	1.3	0.051	12 - 10	3.0 - 6.0	1.22	4
0075	Yellow	7.5	0.295	2.2	0.086	1.3	0.051	12 - 10	3.0 - 6.0	1.22	4

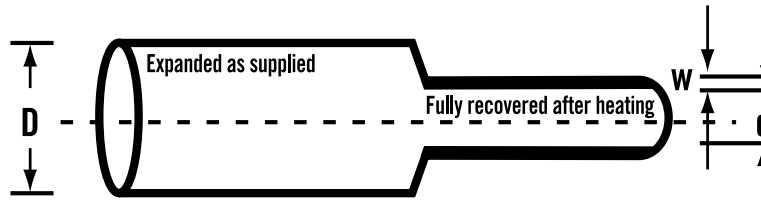

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resultant wall thickness will be less than specified.
- Please specify the product name plus the options you require
- Order Example: DERAY® MDKT, 0177, red, 4 ft lengths

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.